


User Manual

Model TLL151071



33W 2 Ports
QC 3.0+Type-C Charger

1. Product Overview

1.1 Introduction

1.2 Accessories

2. Appearance Description

2.1 Technical Parameters

2.2 Protection

2.3 Material

2.4 Appearance and Interface

3. Operation Instructions

Thank you for choosing our products.
Please read carefully our User Manual before using it, if you have any problem when using, please contact our customer service, we'll solve it as soon as possible.
Any suggestion is welcomed.

1. Product Overview

1. Introduction

- ◆ 33W Qualcomm® quick charge 3.0 charger
 - ◆ Type-C Output: 5Vdc/3A
 - ◆ 33W (3.6V-6.5V)dc/3A, (6.5V-9V)dc/2A, (9V-12V)dc/1.5A
- Qualcomm® quick charge 3.0 technology:
Up to 4X faster than standard chargers, able to charge compatible devices to 80% in just 35 minutes, using the USB port with QC 3.0 technology and compatible cable.
- ◆ Backwards compatible with all versions of Qualcomm Quick Charge technology (1.0, 2.0 & 3.0).
 - ◆ Also compatible with USB-C and provides standard charging for non-Quick Charge devices.
 - ◆ Full speed charging 2 devices at the same time
 - ◆ Efficient synchronous rectification scheme up to 87% of the conversion rate
 - ◆ Elegant, durable, heat eliminable.
 - ◆ Over-load, over-voltage, over-current and short circuit protection.
 - ◆ Compact and unique appearance design by our own, without any gap.
 - ◆ Guaranteed Safety: Premium materials and built-in fail-safes keep you and your device protected against shorts and surges.

1.2 Accessories

- ◆ 33W 2 ports USB CHARGER
- ◆ User Manual

2. Appearance Description

2.1 Technical Parameters

- ◆ Input Voltage: AC 100-240V
- ◆ Quiescent Current: < 0.3mA
- ◆ QC 3.0 Output : (3.6V-6.5V)3A,(6.5V-9V)2A, (9V-12V)1.5A
- ◆ Type-C Output: 5Vdc/3A
- ◆ Max Power: 33W
- ◆ Highest Efficiency: 87%


2.2 Protection

- ◆ Output Short Circuit Protect: to avoid continuing charging devices automatically, on short circuit protection situation, our item will stop charging to protect devices
- ◆ Over Voltage Protection: If Voltage $\geq 6.2V$, protection system will be started
- ◆ High Temperature of main components is higher than 125°C (housing temperature $\geq 58^{\circ}\text{C}$, protection system will be started. If temperature of main components less than 60°C , it will resume working.

2.3 Material

Plastic Housing: PC+ABS+Fireproof material

2.4 Appearance and Interface

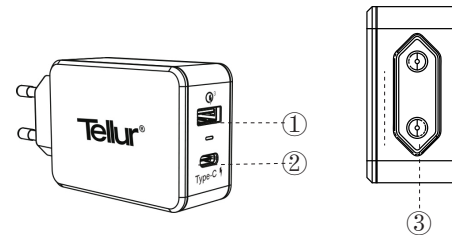

- ① Qualcomm quick charge 3.0 charging port: (3.6V-6.5V)dc/3A,(6.5V-9V)dc/2A,(9V-12V)dc/1.5A
- ② Type-C Output: 5Vdc /3A
- ③ Connect to alternating current, could charge AC Plug based on different market.



3. Operation Instruction

- ◆ As above picture showed, connect to alternating current AC 100-240V , then 33W 2 ports QC 3.0 CHARGER will work. If without loading, its internal consumption is about 100mW.

⚠ Our item is suitable to use in AC 100-240V constant alternating current, if higher or lower voltage is unsuitable

Contact us:

E-mail: office@tellur.ro

Web: www.tellur.ro

Adress: Marinariilor Street no.29, Bucharest, Romania

Phone: +40 21 233 09 95

