




**Ego Bluetooth  
In-Ear Headphones**  
User manual  
TLL511431

A silhouette of a city skyline with various skyscrapers, some with lights on, set against a dark background.

**INTO YOUR FUTURE**

## Technical specifications

Bluetooth version: 5.0

Wireless range: 10m

Supported profiles: HSP, HFP, A2DP, AVRCP

ANC technology: Yes, efficiency  $\geq 22$  db

Multipoint technology: Pair and maintain connections with two phones and answer calls from either phone

Audio codecs supported: SBC, AAC

Speaker size: 13 mm

Frequency response: 20Hz - 20KHz

Speaker impedance:  $16\Omega$

Speaker sensitivity: 103dB (3dB) @ 1 KHz, 126mV

Speaker rated power: 3mW

Microphone sensitivity: 38dB  $\pm 3$ dB

SNR: 60dB

THD: less than 1% 94dB SPL @1kHz

Impedance:  $200\Omega$

Sweat and water resistant: IPX4

Music play time: Up to 9 hours

Standby time: Up to 120 hours

Charge time: Approx. 1.5 hours

Battery capacity: 120mAh

Charging plug: Micro USB

Features: Voice alerts, battery state monitor

Bluetooth pairing name: Tellur Ego

Earphone dimensions: 170 x 132.5 x 20mm

Weight earphone: 28g

Material: TPU + ABS and TPE for cables

Color: Black

Package includes:

1 x Ego Bluetooth In-Ear Headphones

1 x USB to Micro USB cable

3 x Set of ear tips (S, M, L)

1 x Manual

Operating temperature:  $-15^{\circ}\text{C}$  to  $45^{\circ}\text{C}$

## **Pairing**

1. Make sure the headphones and your Bluetooth device are next to each other (within 1m)
2. Press and hold the multifunction button (MFB) for more than 1 second to power on the headphones (Voice prompt: Power On). The headphones will enter pairing mode automatically and the LED indicator will be flashing blue and red alternately (Voice prompt: Pairing).
3. Activate Bluetooth function on your phone and search for the nearby Bluetooth connection "Tellur Ego".
4. Once connected, only the blue LED will flash once every 5s (Voice prompt: Connected).

## **Active Noise Cancelling (ANC)**

To activate ANC function double press MFB button (Voice prompt: ANC On)

To deactivate ANC function, double press again the MFB button (Voice prompt: ANC Off)

## **Charging**


1. Connect the charging port with any USB charging adapter or active computer USB port.
2. Charging will start automatically, and the LCD indicator will turn red.
3. When the LED indicator has turned off, the headphones are fully charged.

## **Multipoint**

1. Use the pairing operation to connect with phone A, then turn off the Ego headphones.
2. Turn on the Ego headphones again to go into the pair mode and repeat the pairing steps to connect with phone B.
3. Then turn off the Ego headphones again.
4. At last, turn on the Ego headphones (without entering pairing mode) and they will connect with phone A and phone B automatically.

\*\*\*Some phone models require manual select and connect when pairing with the second phone.

## Product diagram

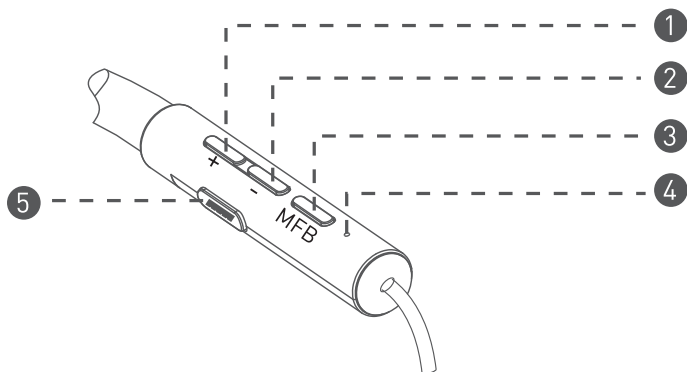

1. + key – volume up / next song
2. – key – volume down / previous song
3. MFB – multifunction button
4. LED indicator
5. Micro USB charging port

<b>Function</b>	<b>Operation</b>
Power ON/Off	Press and hold the Multifunction button (MFB) for about 1s
Play/Pause	Press the Multifunction button (MFB)
Volume +/-	Press the Volume +/- button
Play Next/Previous	Press and hold the volume +/- button for 1s
Answer Phone Call	Press the Multifunction button (MFB)
Hang Up	Press the Multifunction button (MFB)
Reject Phone Call	Press the Multifunction button (MFB) for 1s
ANC mode On/Off	Press the Multifunction button (MFB) twice
Pairing Mode	When the headphone is Off, press the Multifunction button (MFB) for 3s
Siri	Press Multifunction button (MFB) three times

<b>Led Indicator</b>	<b>Status</b>
Solid red	Charging
Flashes blue and red alternately	In pairing mode
Flashes blue and red alternately	Disconnected from Bluetooth device
Flashes blue once every 5s	Paired with a Bluetooth device

## **Warnings**

1. Do not clean the headphones with abrasive clothes or substances.
2. Do not expose this product to excessive heat or fire sources.
3. Do not expose this product to direct sunlight for long periods of time.
4. Do not attempt to disassemble this product.
5. Do not use this product in heavy rain or very moist environment.
6. If you don't use this product for a long period of time, store it in a dry environment and charge the headphone at least once a month to maintain a healthy battery.
7. Avoid extreme temperature and dust.

## Disposal and recycling information



The crossed-out wheeled-bin symbol on your product, battery, literature or packaging reminds you that all electronic products and batteries must be taken to separate waste collection points at the end of their working lives; they must not be disposed of in the normal waste stream with household garbage.

It is the responsibility of the user to dispose of the equipment using a designated collection point or service for separate recycling of waste electrical and electronic equipment (WEEE) and batteries according to local laws.

Proper collection and recycling of your equipment helps ensure EEE waste is recycled in a manner that conserves valuable materials and protects human health and the environment, improper handling, accidental breakage, damage, and/or improper recycling at the end of its life may be harmful for health and environment.